


4.3" Lite Display Module with Resistive Touch

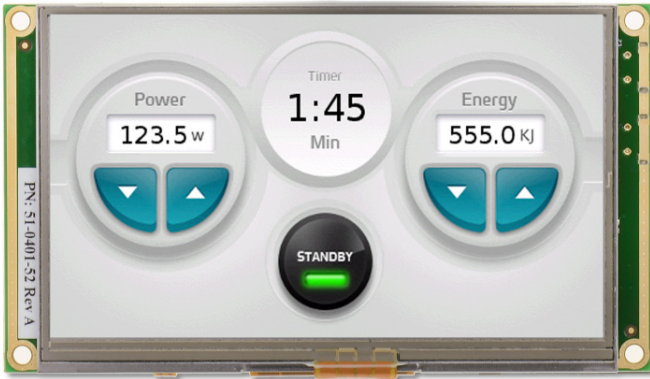

4.3" Display Modules are ultra compact and combine a multi-function processor board and a 4.3-inch WQVGA (480 x 272) TFT color LCD. Model G2C1L-R includes resistive touch. Modules offer input/output (I/O) options including one RS-232 serial port and 10/100 Ethernet. Each module is small enough to fit in a 2U high rack enclosure. Onboard flash memory is used for program and data storage. A "captive" Micro SD card socket (not the push-pull type that can become dislodged during shipping) is provided for additional storage. All I/O connectors provide significant locking tabs for reliable operation in industrial applications. ESD and EMC test results are provided to ease regulatory compliance testing. Like all Reach products, these modules are designed for long-term availability with a 10+ year processor life and a multi-sourced, industry standard LCD form factor.


| Size | Model |
|-----------|--|
| 4.3" Wide | G2C1L-R Reduced feature version of G2C1 with resistive touch. |

Hardware Features

- WQVGA (480 x 272) LCD with LED Backlight
- NXP i.MX28 454Mhz Processor
- 10/100 Mbps Base-T Ethernet
- RS232 "Application" Async Serial Port, RS232 Console Port
- 128 MB DDR2 DRAM
- 128 MB NAND Flash
- Micro SD Flash Card Socket
- Resistive Touchscreen Interface
- Backlight Brightness Control


Software Features

- Linux Kernel 2.6.35 with Qt 4.8.4 and QtCreator IDE 2.8.0
- Production quality Web Server (lighttpd) with CGI, PHP support
- Samba File Server for easy file access from Windows
- UBIFS NAND Flash file system for speed and reliability
- SSH Server
- Interfaces for QML Applications: Serial, Ethernet, and CAN
- Custom Linux Kernel Build Supported and Maintained by Reach. [Contact us](#) for your specific requirements.

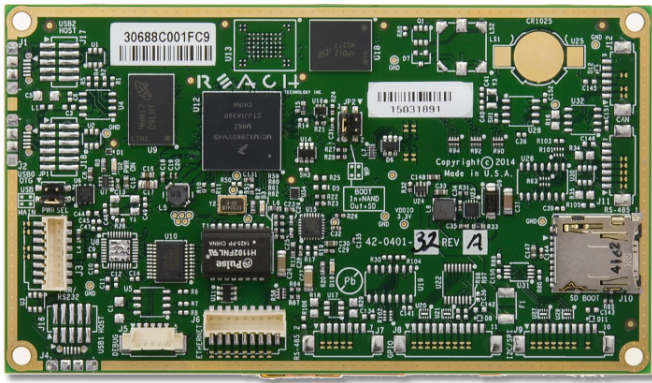

4.3" G2C1L-R Display Module, back view

Mechanical Specifications

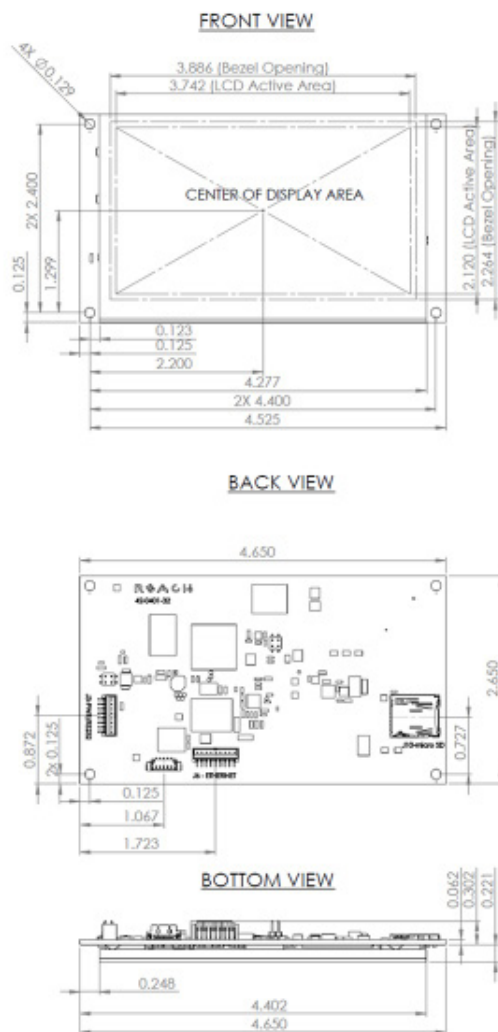

Mechanical Specifications, 3D Mechanical Views, 2D DXF Mechanical Drawings, 3D Step Files can be found for each Display Module at LinuxTouchscreen.com/products/production-modules/4-3-modules/.

Specifications

LCD

- Display Type: 4.3" Diagonal TFT Color LCD
- Resolution: 480 x 272 WQVGA, Full 24-bit Color
- Dot Pitch: 0.198mm x 0.198mm
- Luminance (with touchscreen): Typical 400 (cd/m²)
- Viewing Angles: 70/70 left/right, 50/70 up/down
- Viewing Direction: 6 o'clock
- Brightness: Software Controlled
- Backlight: White LED, On-board Driver

Resistive Touchscreen

- Type: 4-Wire Analog Resistive
- Controller: Built-In
- Driver: Standard Linux Driver
- Durability: Over One Million Touches

Ethernet Interface

- MAC / PHY: On-board
- Type: 10/100 Base-T
- Interface: Low Profile Molex Pico-SPOX (24AWG Compatible Crimps)

Mechanical

- Dimensions: 4.65" W x 2.65" H x 0.522" D
- Weight: 120 Grams

Power Requirements

- Power Supply Voltage: +5VDC
- Power Consumption: Max 650mA/5VDC

Environmental/Regulatory

- Operating Temperature: -20 to 70° C
- Storage Temperature: -30 to 80° C
- Humidity: Max 90%RH at 60° C; No Condensation
- EMI and ESD Test Results Available: Contact Reach.
- Passes FCC Class B Emissions without an enclosure (8-layer fully shielded PCB).
- Survives 27KV ESD (in enclosure) to pass strict gaming commission standards.
- Thermal, Mechanical, Vibration: Contact Reach
- RoHS 2 Compliant: Yes

Ordering Information

| Product | Part Number | Price |
|---|-------------|---|
| 4.3" Lite (Model G2C1L-R) Display Module with Resistive Touch | 51-0401-52 | Contact Reach Sales (408-754-4176, sales@reachtech.com) for volume pricing. |
| Development Kit | 52-0401-52 | \$299 |

To get started order a Development Kit which comes with all the hardware, software, and full support.

Order at LinuxTouchscreen.com, call Reach Sales at 408-754-4176, or email sales@reachtech.com.

Accessories

| Part Number | Description |
|-------------|---|
| 23-0144-10 | Cable, GPIO, 11pin PicoBlade, 10 in. Flying Lead |
| 23-0145-10 | Cable, RS485/RS22, 7pin PicoBlade , 10in. Flying Lead |
| 23-0146-10 | Cable, CAN 6pin PicoBlade, 10 in. Flying Lead |
| 23-0147-10 | Cable, Power/Serial, 8pin Pico-SPOX, 10 in. Flying Lead |
| 23-0148-12 | Cable, Ethernet (Shielded), RJ-45 plug to 9pin Pico-SPOX, 12 in. |
| 23-0149-10 | Cable, I2C, 10pin PicoBlade, 10 in. Flying Lead |
| 23-0151-03 | Cable, Micro USB to USB "A" Female (Use to connect USB devices with standard "A" type male plugs.) |
| 23-0160-18 | Cable, Y-type, 5V Power 2.5mm I.D. Barrel Female – 8pin Pico-SPOX – DB9 RS232 |
| 23-0161-72 | Cable, USB RS232 to 5pin PicoBlade, 72 in. Debug/Console |
| 30-0008-01 | Power Supply; 5 Volt, 2.5A, 2.5mm |
| 37-0008-01 | USB to RS232-Db9 Male Adapter with Cable |
| 37-0012-01 | Cat5e Inline Female / Female Ethernet Coupler |
| 37-0013-01 | USB to a WiFi 802.11b/g/n Adapter |

See pictures of accessories and order online at linuxtouchscreen.com/products/accessories/.

Custom versions are available to volume customers; please contact Reach Sales (sales@reachtech.com or 408-754-4176) for more information.